Input Circuits

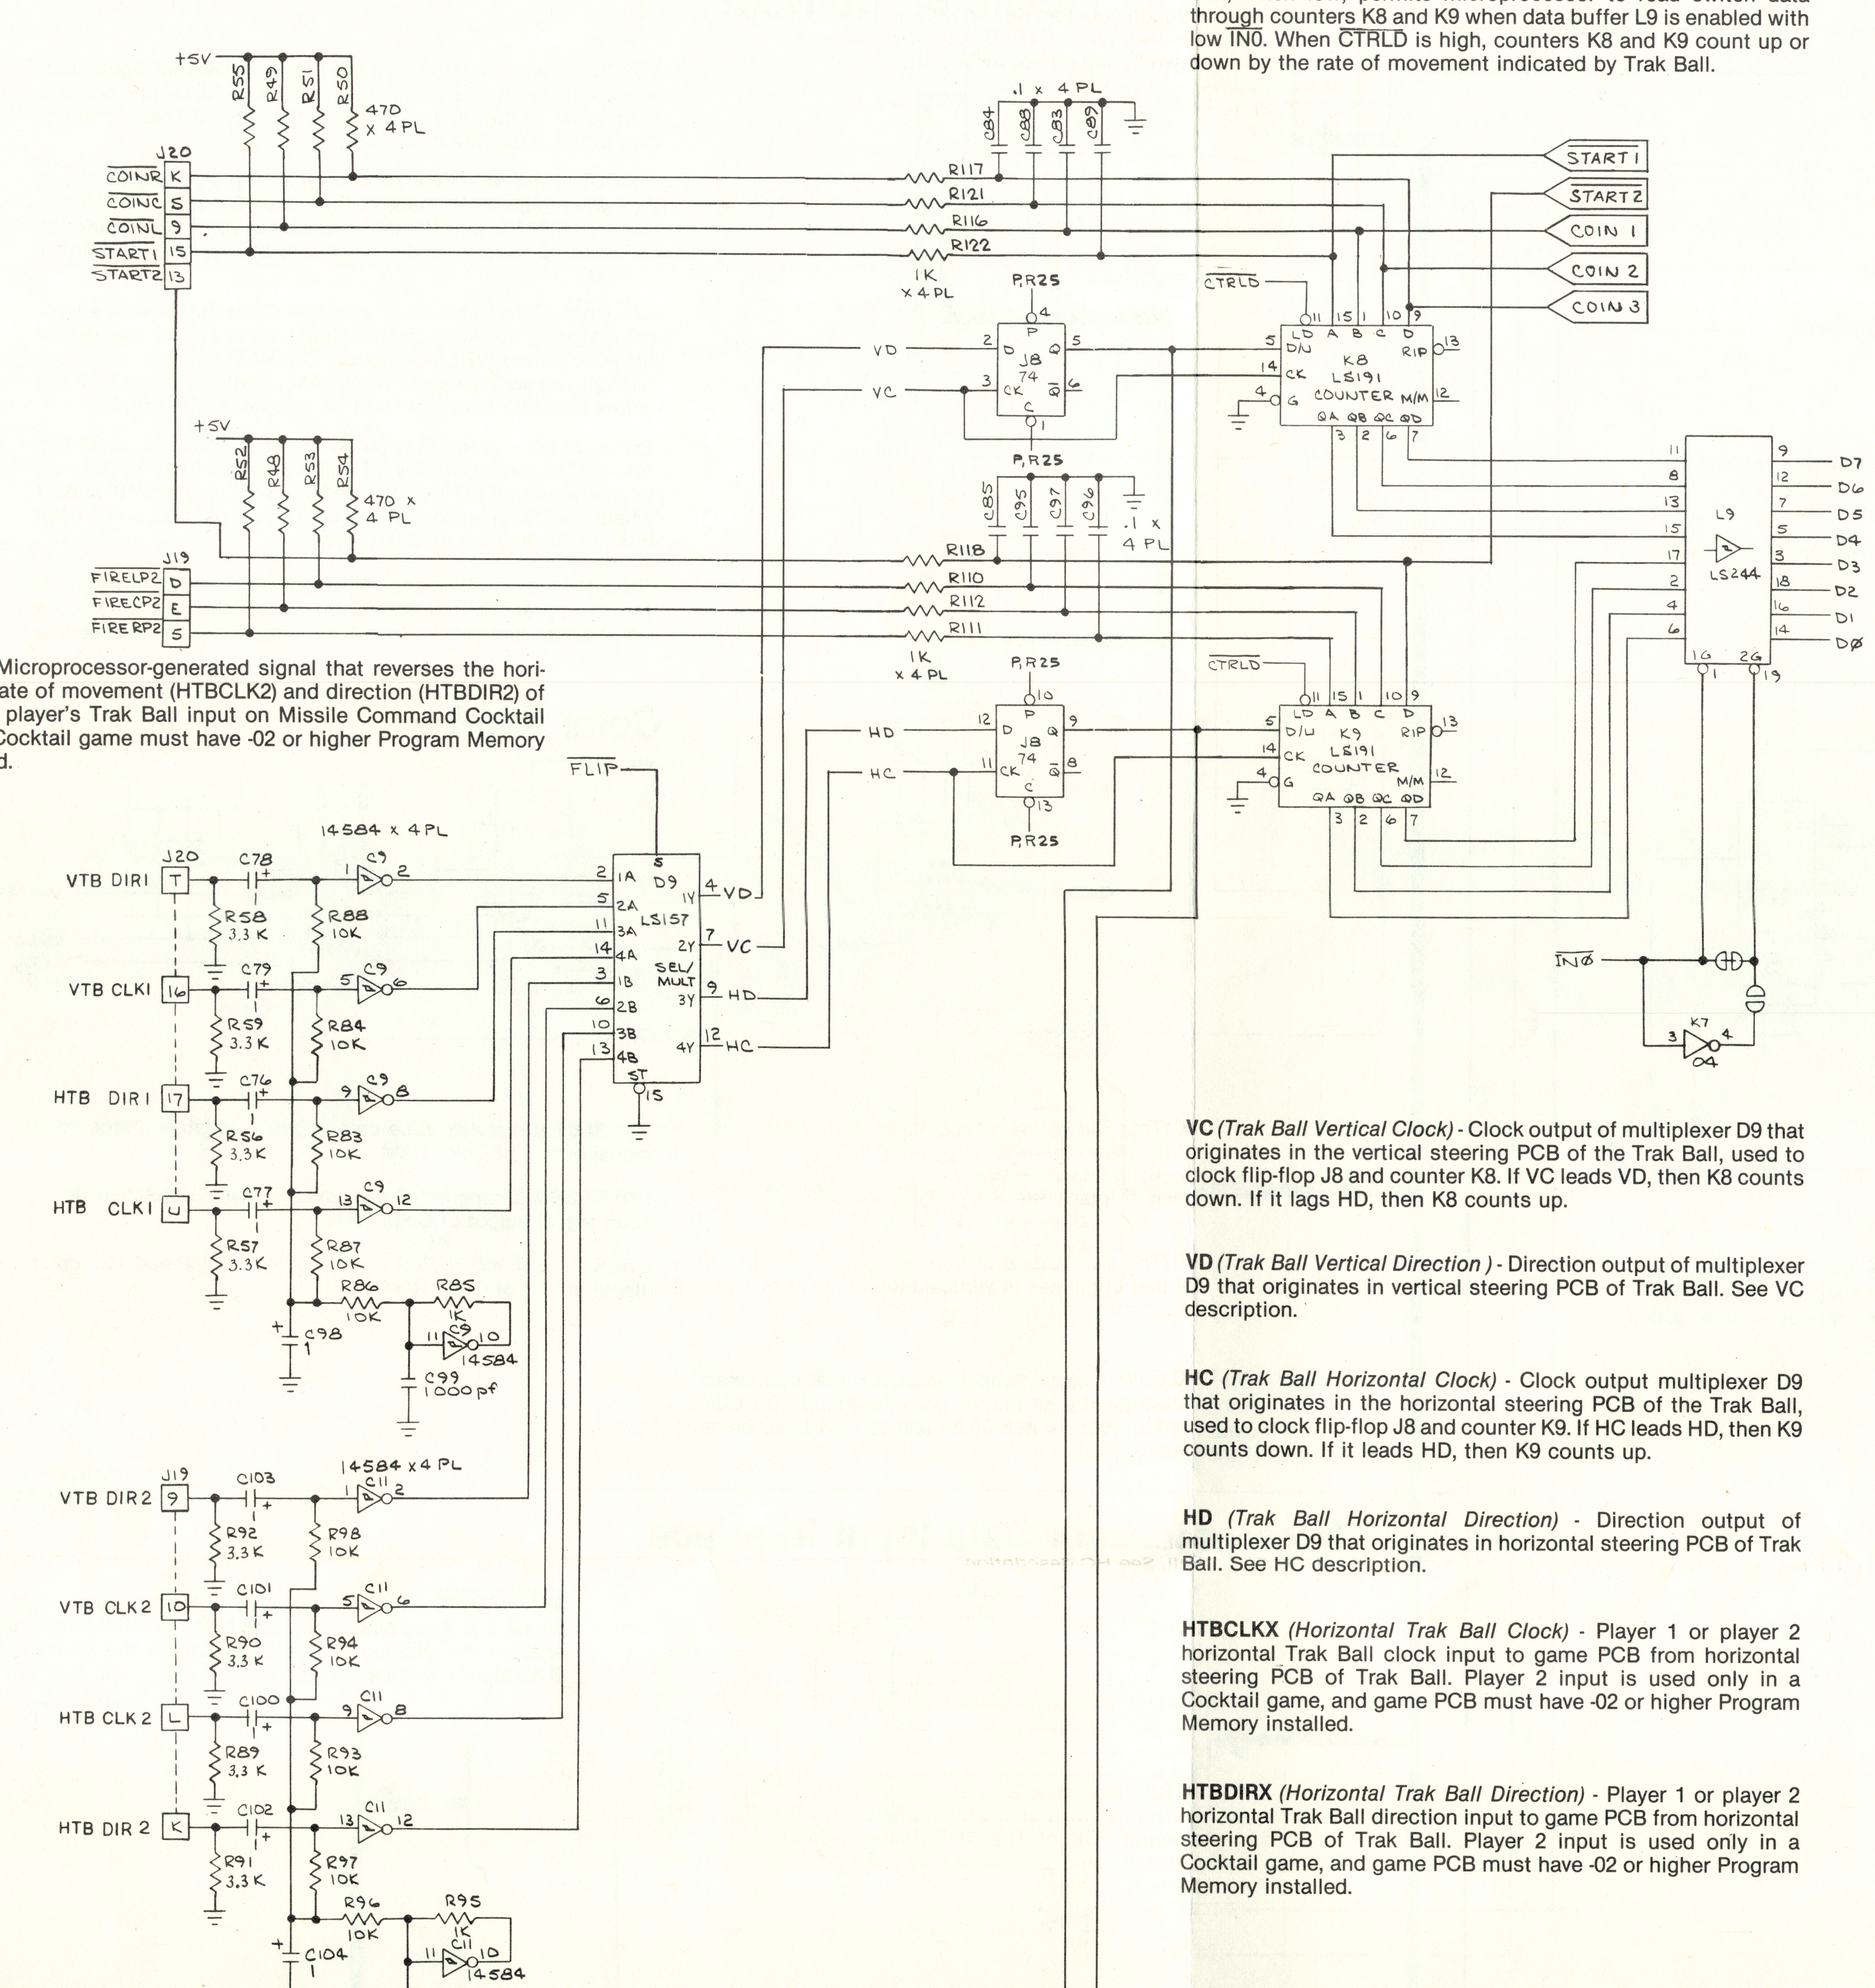

CTRLD *(Counter load enable)* - Latched microprocessor output that, when low, permits microprocessor to read switch data through counters K8 and K9 when data buffer L9 is enabled with low IN0. When CTRLD is high, counters K8 and K9 count up or down by the rate of movement indicated by Trak Ball.

FLIP - Microprocessor-generated signal that reverses the horizontal rate of movement (HTBCLK2) and direction (HTBDIR2) of second player's Trak Ball input on Missile Command Cocktail game. Cocktail game must have -02 or higher Program Memory installed.

VC *(Trak Ball Vertical Clock)* - Clock output of multiplexer D9 that originates in the vertical steering PCB of the Trak Ball, used to clock flip-flop J8 and counter K8. If VC leads VD, then K8 counts down. If it lags HD, then K8 counts up.

VD *(Trak Ball Vertical Direction)* - Direction output of multiplexer D9 that originates in vertical steering PCB of Trak Ball. See VC description.

HC *(Trak Ball Horizontal Clock)* - Clock output multiplexer D9 that originates in the horizontal steering PCB of the Trak Ball, used to clock flip-flop J8 and counter K9. If HC leads HD, then K9 counts down. If it leads HD, then K9 counts up.

HD *(Trak Ball Horizontal Direction)* - Direction output of multiplexer D9 that originates in horizontal steering PCB of Trak Ball. See HC description.

HTBCLKX *(Horizontal Trak Ball Clock)* - Player 1 or player 2 horizontal Trak Ball clock input to game PCB from horizontal steering PCB of Trak Ball. Player 2 input is used only in a Cocktail game, and game PCB must have -02 or higher Program Memory installed.

HTBDIRX *(Horizontal Trak Ball Direction)* - Player 1 or player 2 horizontal Trak Ball direction input to game PCB from horizontal steering PCB of Trak Ball. Player 2 input is used only in a Cocktail game, and game PCB must have -02 or higher Program Memory installed.

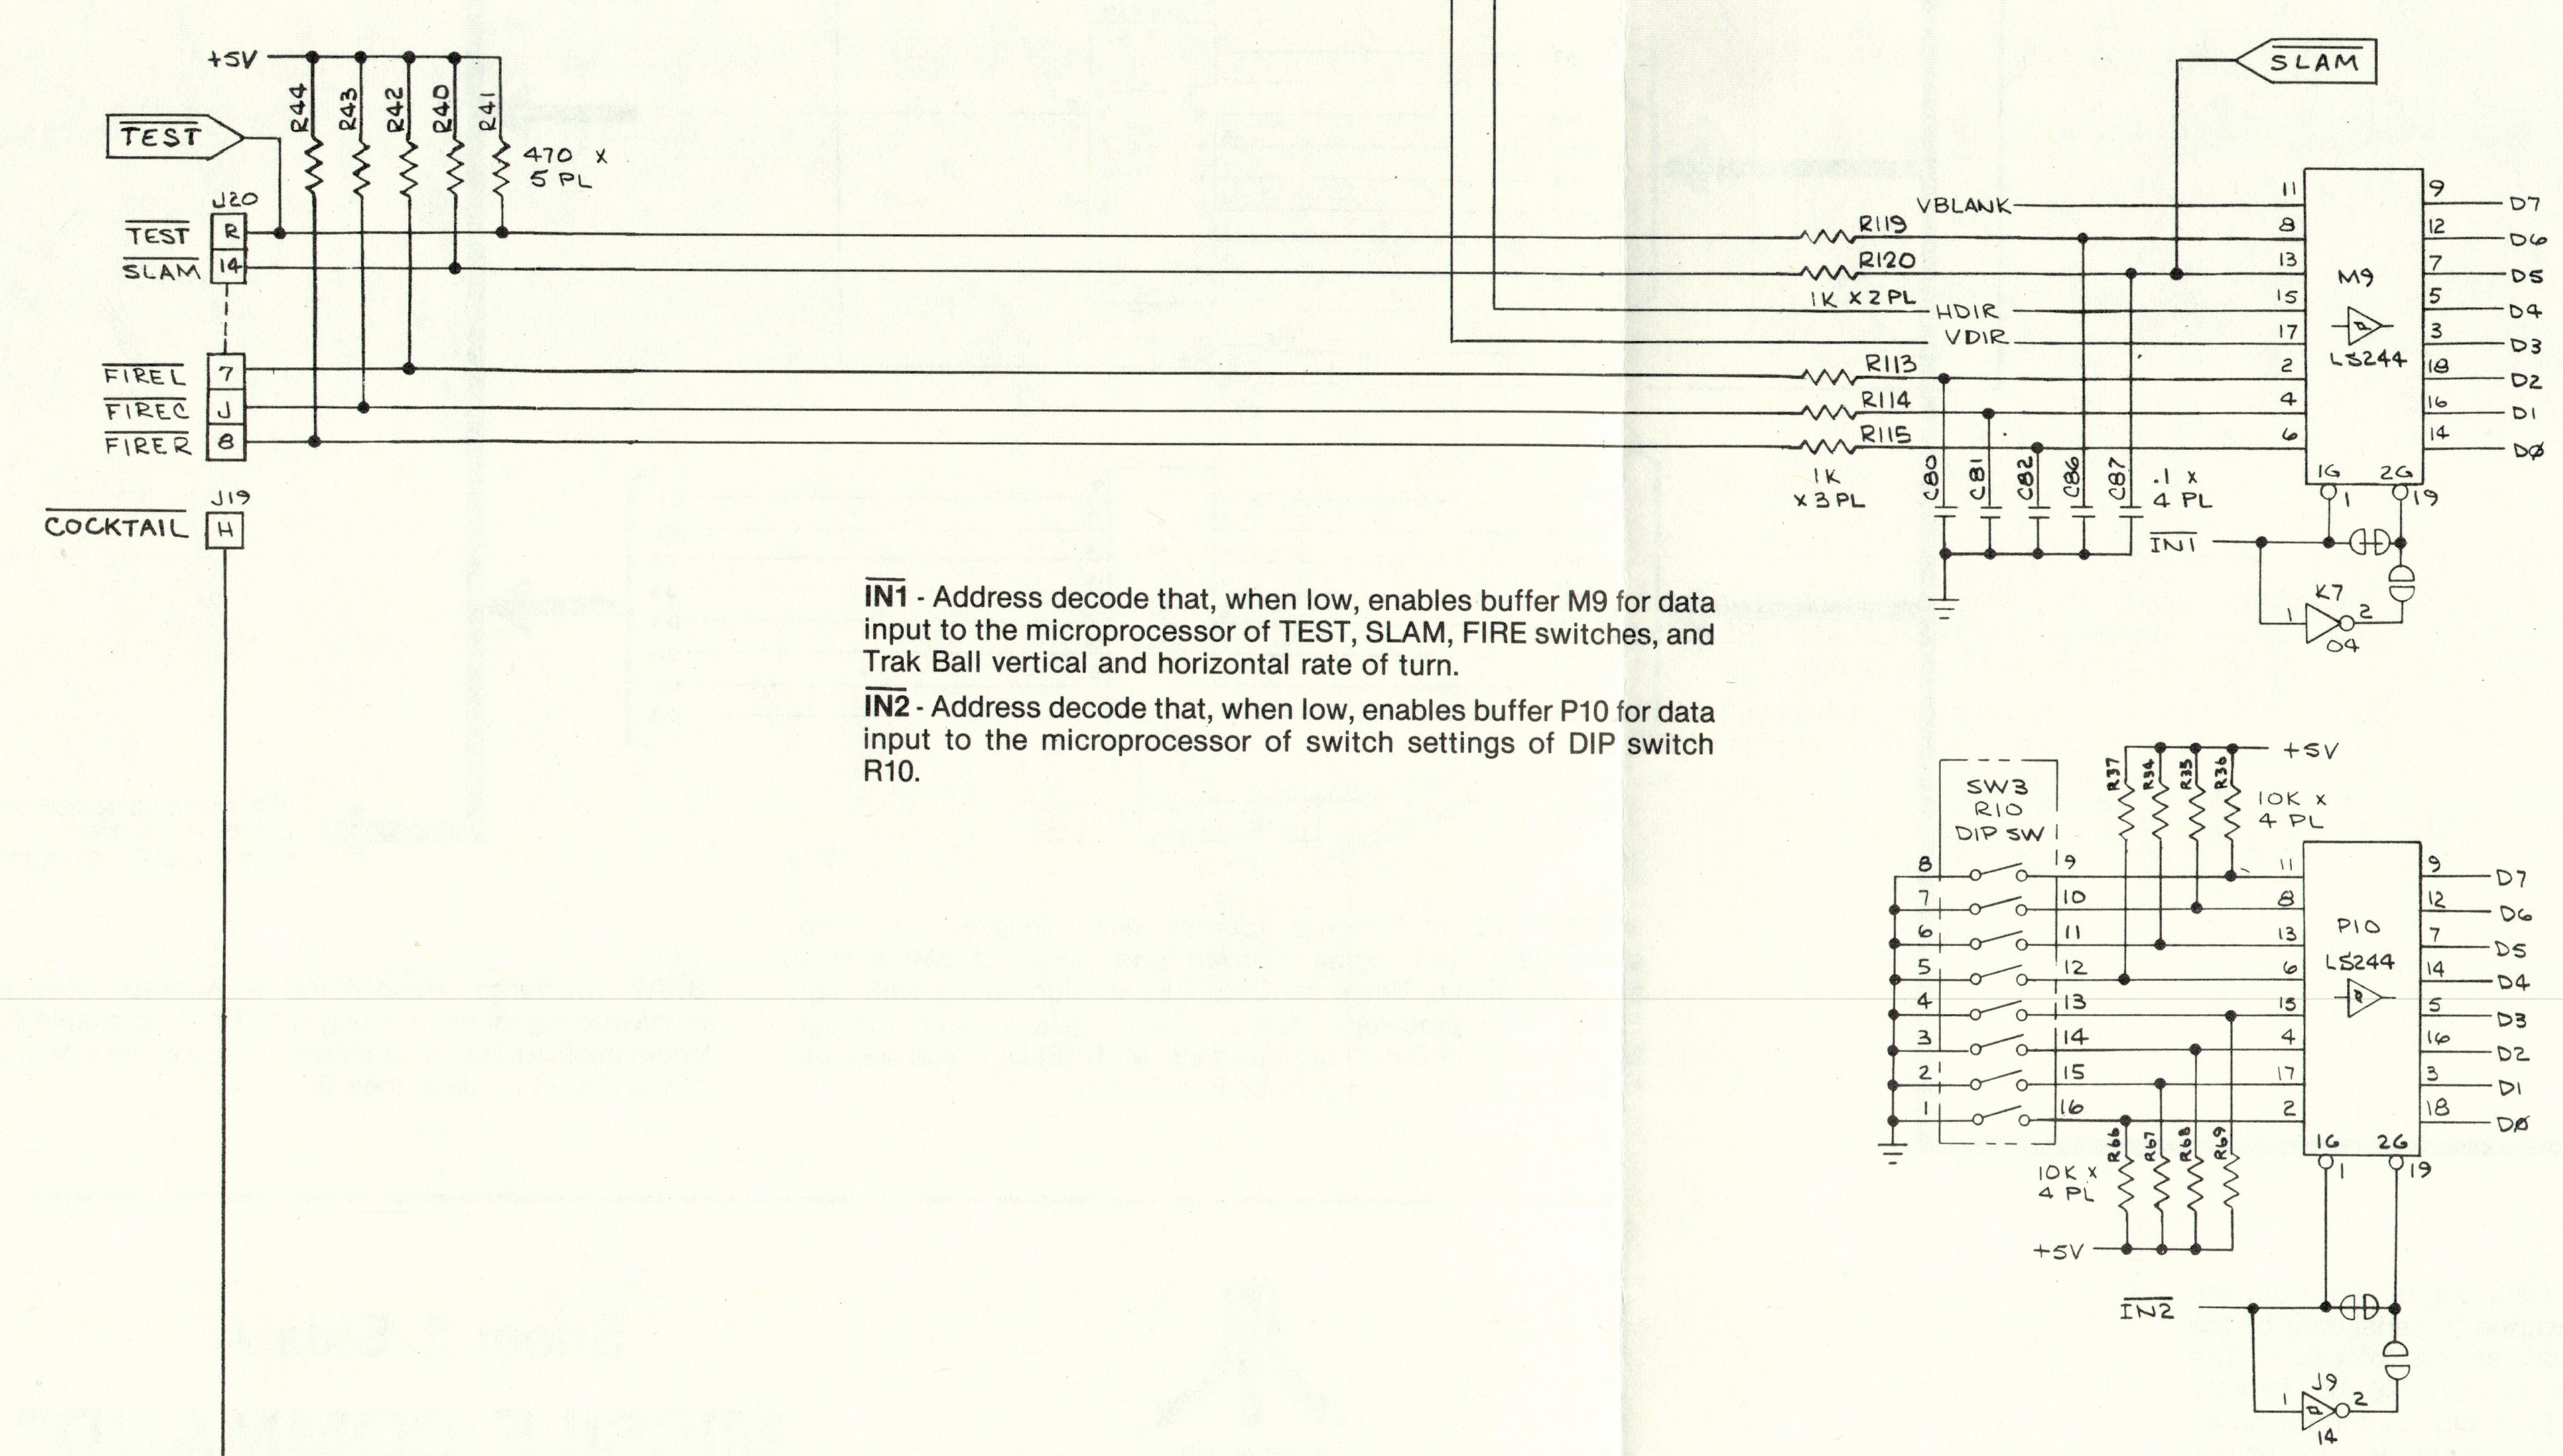

IN1 - Address decode that, when low, enables buffer M9 for data input to the microprocessor of TEST, SLAM, FIRE switches, and Trak Ball vertical and horizontal rate of turn.

IN2 - Address decode that, when low, enables buffer P10 for data input to the microprocessor of switch settings of DIP switch R10.

Memory Map for Address Decoding Circuit, Sheet 1, Side B

MEMORY MAP

HEXIDECIMAL	A15	A14	A13	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	R/W	D7	D6	D5	D4	D3	D2	D1	D0	FUNCTION
0000-01FF	0	0	0	0	0	0	A	A	A	A	A	A	A	A	A	A		D	D	D	D	D	D	D	D	512 Bytes of Working RAM
0200-05FF	0	0	0	0	0	A	A	A	A	A	A	A	A	A	A	A		D	D	D	D	D	D	D	D	3rd-color-bit region of Screen RAM
0600-063F	0	0	0	0	0	1	1	0	0	0	A	A	A	A	A	A		D	D	D	D	D	D	D	D	More Working RAM
06F0-3FFF	0	0	A	A	A	A	A	A	A	A	A	A	A	A	A	A		D	D	D	D	D	D	D	D	2-color-bit region of Screen RAM
4000-400F	0	1	0	0	0	0	0	0	0	0	0	0	A	A	A	A		D	D	D	D	D	D	D	D	POKEY Ports
4800	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R	D								Right Coin Switch Input
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R		D							Center Coin Switch Input
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R			D						Left Coin Switch Input
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R				D					1-player Start Switch Input
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R					D				2-player Start Switch Input
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R						D			2nd-player left Fire Switch Input (Cocktail Only)
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R							D		2nd-player center Fire Switch Input (Cocktail Only)
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R								D	2nd-player right Fire Switch Input (Cocktail Only)
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R					D	D	D	D	Horizontal TRAK BALL displacement if CTRLD latched high
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	R	D	D	D	D					Vertical TRAK BALL displacement if CTRLD latched high
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W		D							Screen Flip
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W			D						Left Coin Counter Output
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W				D					Center Coin Counter Output
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W					D				Right Coin Counter Output
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W						D			2-Player Start LED Output
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W							D		1-Player Start LED Output
	0	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	W								D	CTRLD - If low, read Switches. If high, read TRAK BALL
4900	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R	D								VBLANK read
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R		D							Self-Test Switch Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R			D						SLAM Switch Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R				D					Horizontal TRAK BALL Direction Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R					D				Vertical TRAK BALL Direction Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R						D			1st-player left Fire Switch Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R							D		1st-player center Fire Switch Input
	0	1	0	0	1	0	0	1	0	0	0	0	0	0	0	0	R								D	1st-player right Fire Switch Input
4A00	0	1	0	0	1	0	1	0	0	0	0	0	0	0	0	0	R	D	D	D	D	D	D	D	D	Option Switch Inputs
4B00-4B07	0	1	0	0	1	0	1	1	0	0	0	0	0	A	A	A	W					D	D	D	D	Color RAM
4C00	0	1	0	0	1	1	0	0	0	0	0	0	0	0	0	0	W									Watchdog
4D00	0	1	0	0	1	1	0	1	0	0	0	0	0	0	0	0	W									Interrupt Acknowledge
5000-7FFF	0	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	R	D	D	D	D	D	D	D	D	Program

VTB CLKX *(Vertical Trak Ball Clock)* - Player 1 or player 2 vertical Trak Ball clock input to game PCB from vertical steering PCB of Trak Ball. Player 2 input is used only in Cocktail game, and game PCB must have -02 or higher Program Memory Installed.

VTB DIRX *(Vertical Trak Ball Direction)* - Player 1 or player 2 vertical Trak Ball direction input to game PCB from vertical steering PCB of Trak Ball. Player 2 input is used only in Cocktail game, and game PCB must have -02 or higher Program Memory Installed.

IN0 - Address decode that, when low, enables buffer L9 for data input to the microprocessor of COIN switches, START switches, player 2 FIRE switches (for Cocktail game only), or Trak Ball rate of turn information. If CTRLD is low, data is from switches. If high, Data is Trak Ball information.

Output Circuits

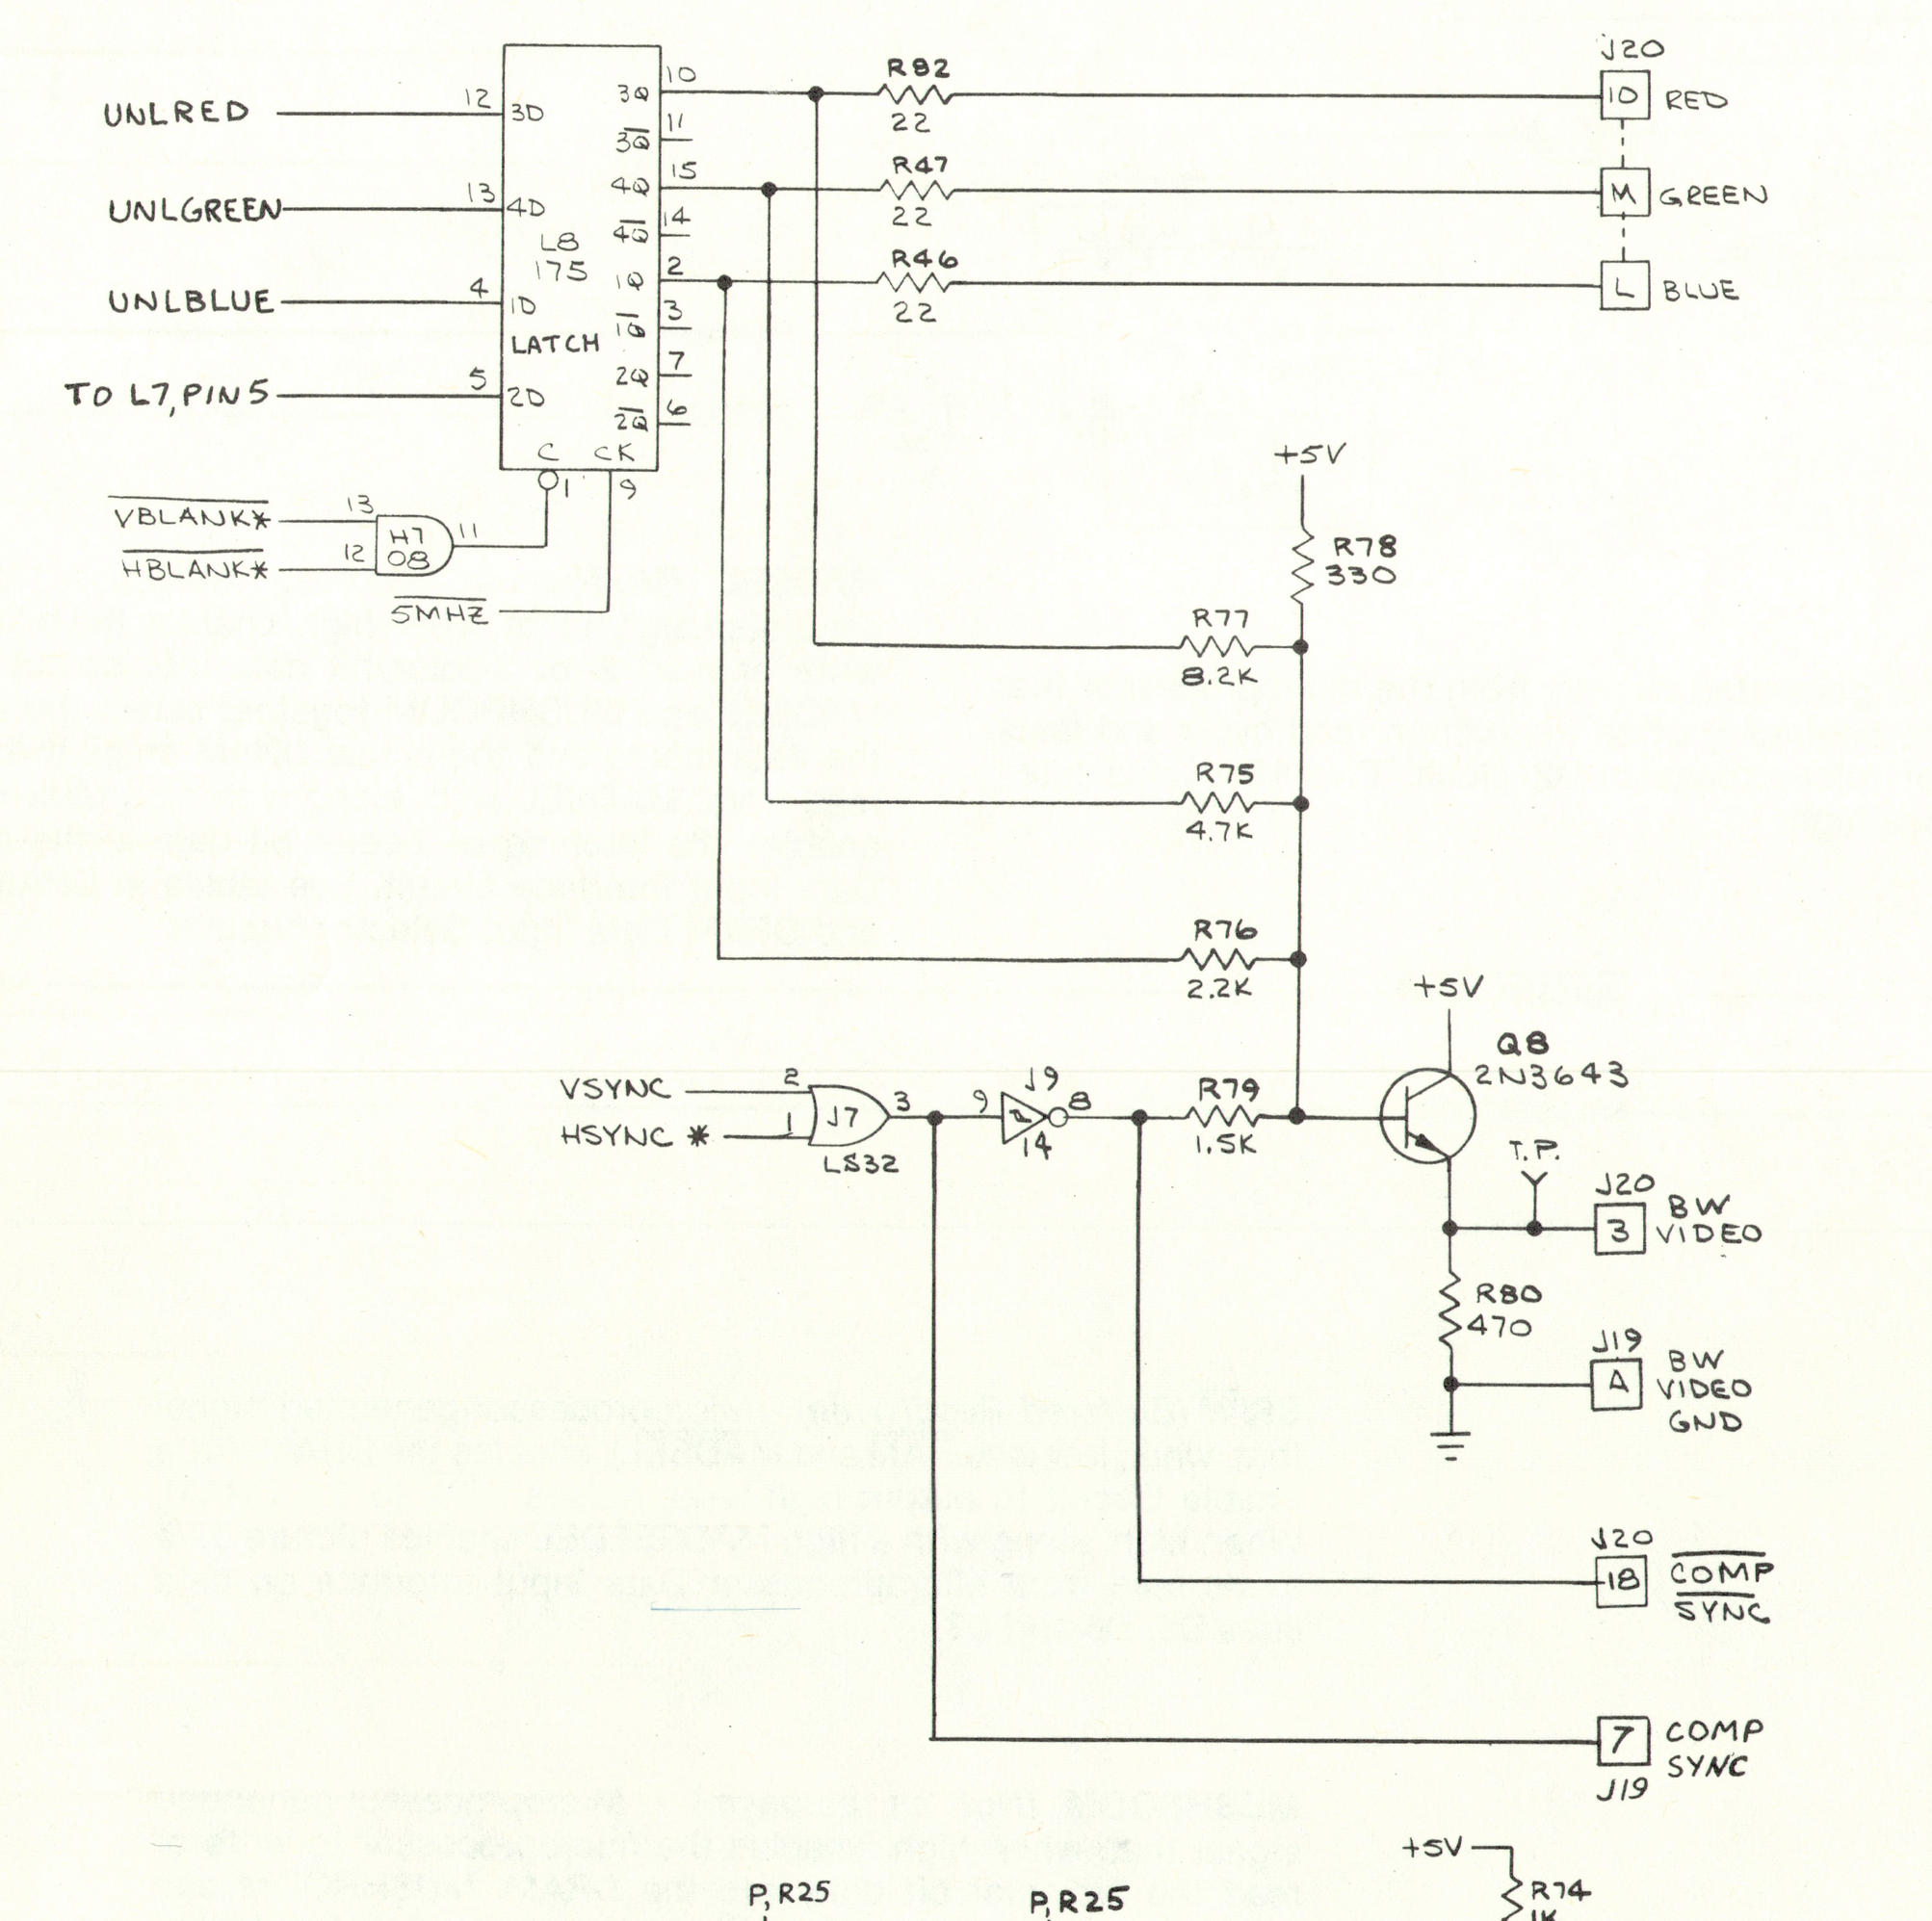

OUT0 - Address decode that, when it goes low, latches microprocessor-buffered data bits DB0 thru DB6 at the output of latch F9.

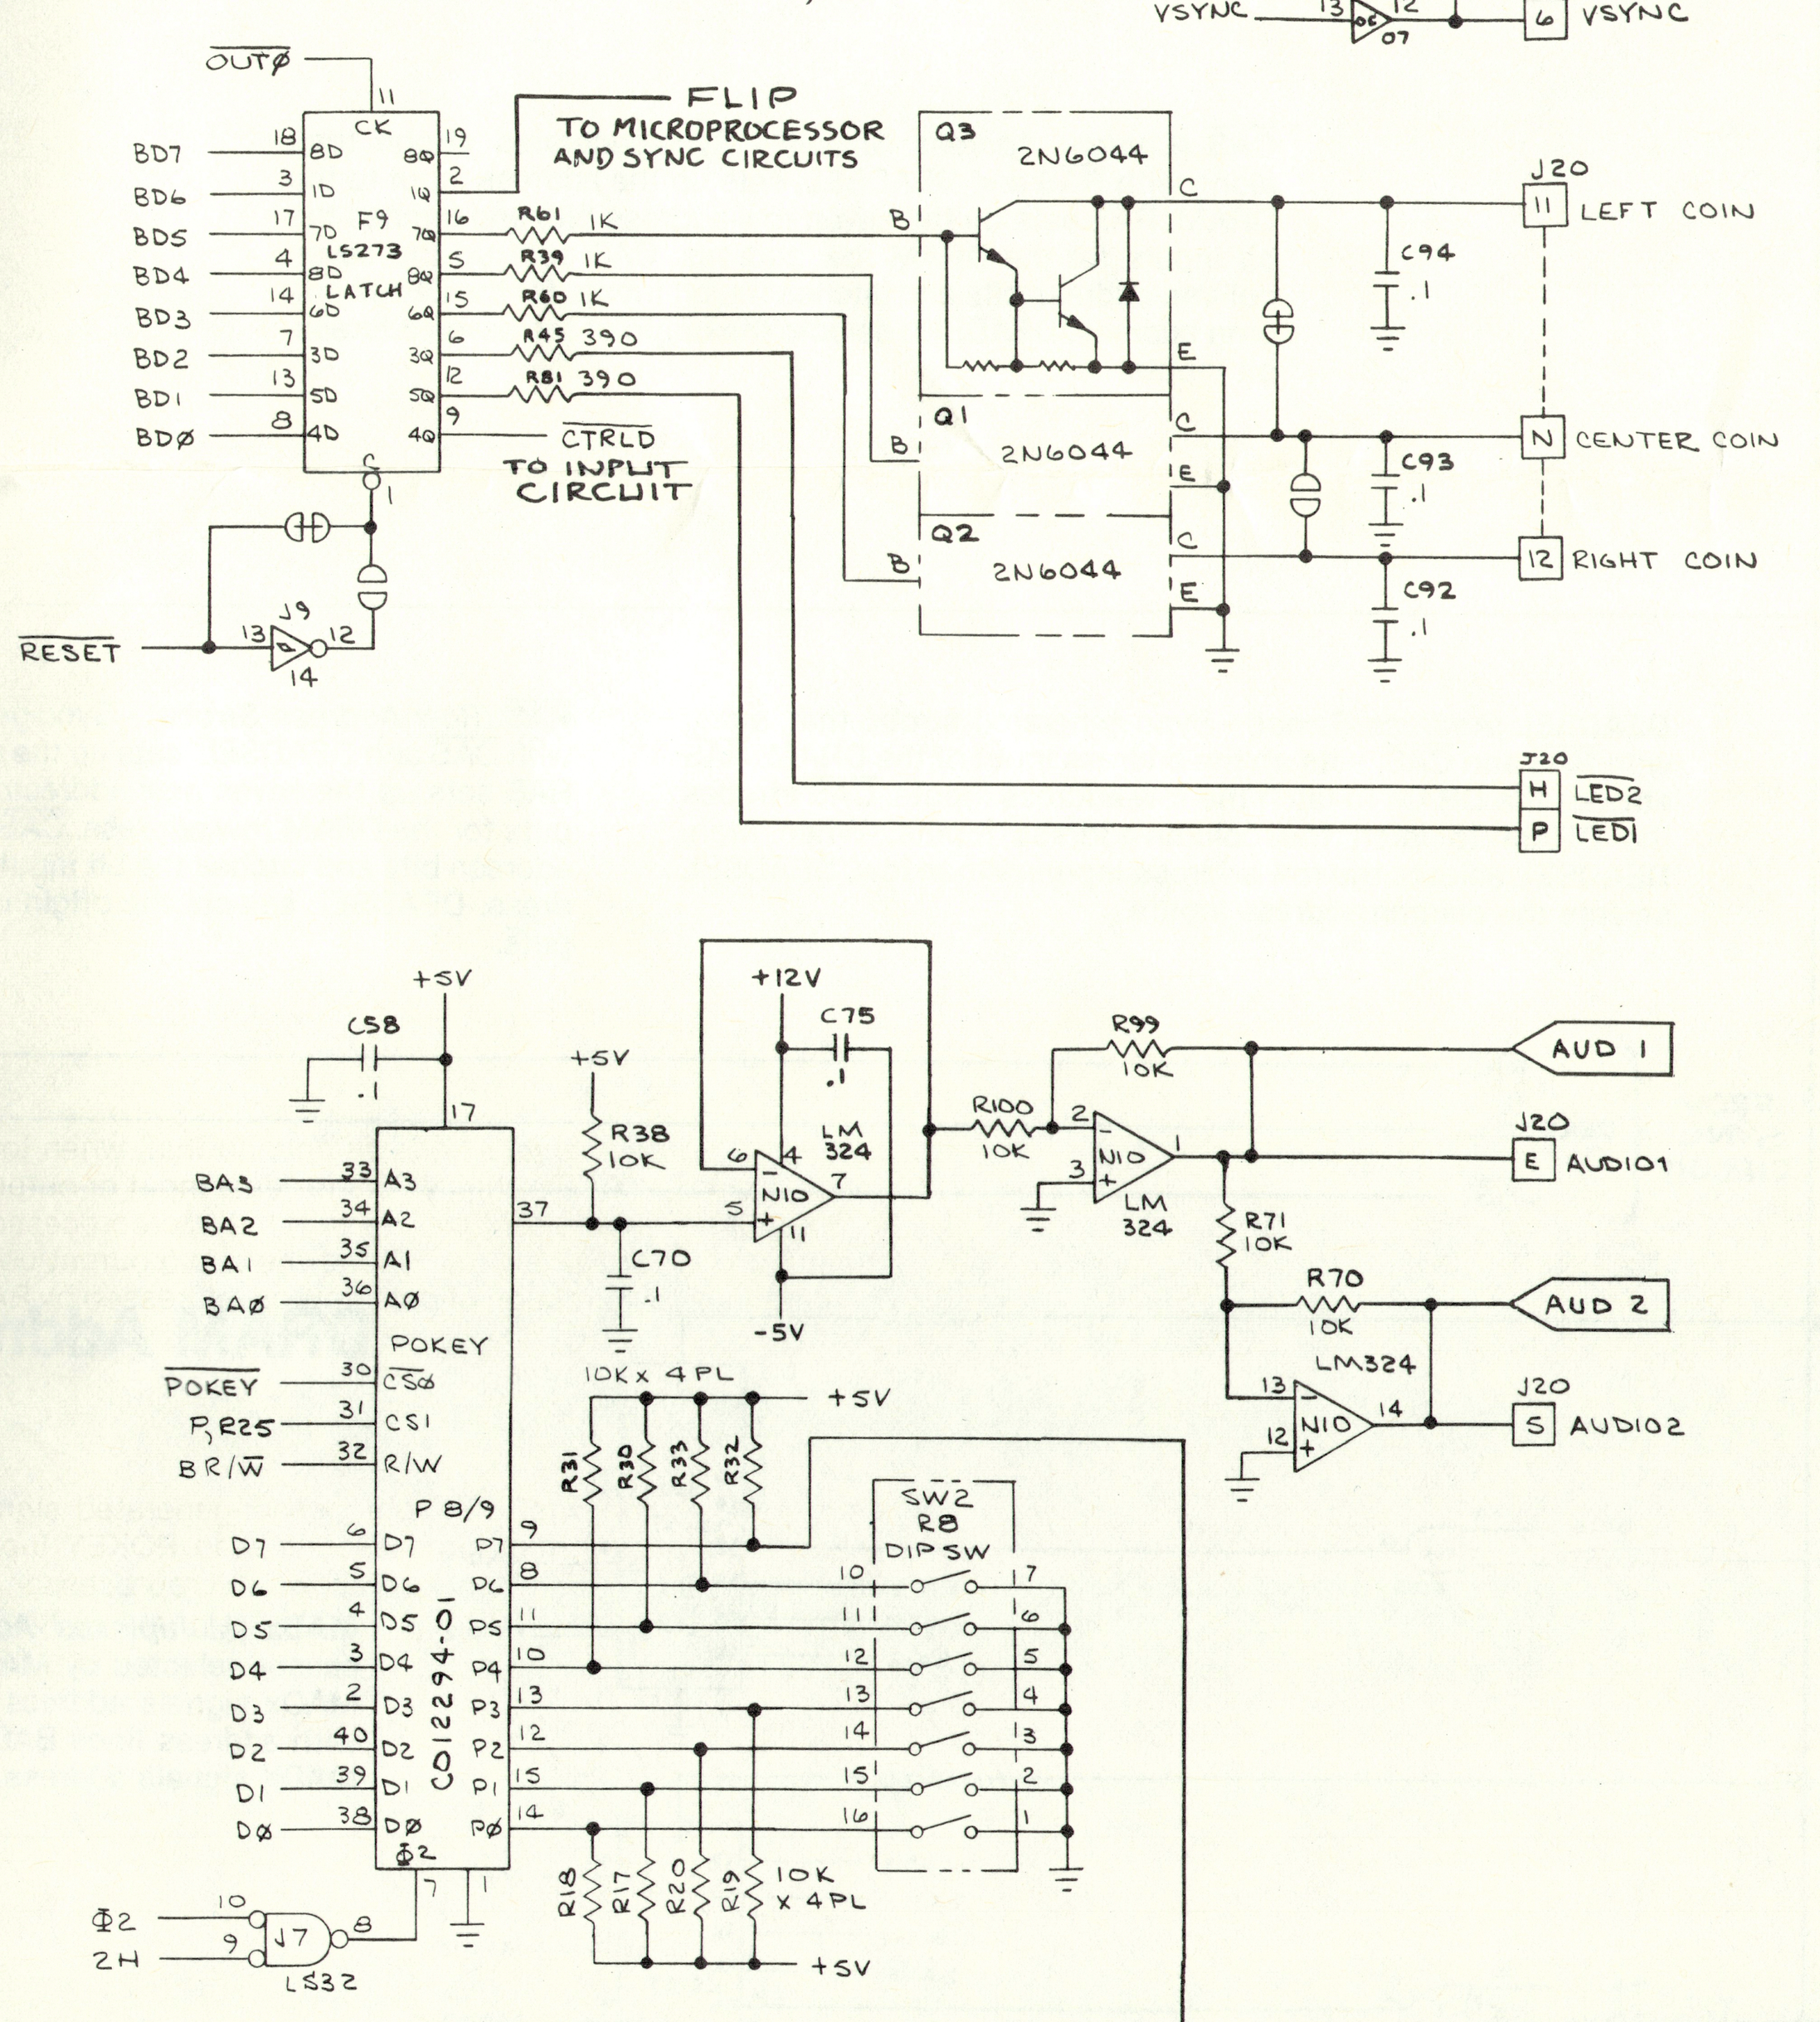

POKEY *(POKEY chip enable)* - Address decode that, when low, enables custom I/O POKEY chip N/P8/9 for data input or output. The POKEY chip works in conjunction with the microprocessor. It is the input port for DIP switch R8 and the audio output port. BR/W determines the direction of data flow as addressed by BA0 thru BA3.

BR/W *(Buffered Read/Write)* - Microprocessor-generated signal that, when high, allows microprocessor to read POKEY input data from DIP switch R8. When low, allows microprocessor to write to POKEY output.

NOTICE TO ALL PERSONS RECEIVING THIS DRAWING
CONFIDENTIAL: Reproduction forbidden without the specific written permission of Atari, Inc., Sunnyvale, CA. This drawing is only conditionally issued, and neither receipt nor possession thereof confers or transfers any right in, or license to use, the subject matter of the drawing or any design or technical information shown thereon, nor any right to reproduce this drawing or any part thereof. Except for manufacture by vendors of Atari, Inc., and for manufacture under the corporation's written license, no right to reproduce this drawing is granted or the subject matter thereof unless by written agreement with or written permission from the corporation.

ATARI®
A Warner Communications Company

Sheet 2, Side B

MISSILE COMMAND™

Input and Output Circuitry

Section of 035467-XX D

© 1980 Atari, Inc.